



LIDERKIT GROUP

Pol. Ind. El Guadiel Tel. + 34 953 67 80 41
 Avd. Linares, 17 Fax. + 34 953 67 63 52
 23210 Guarroman www.liderkit.com
 Jaen (SPAIN)




MODEL 644. PLYWOOD KIT 14MM

Roof : Made of translucent polyester 1,6mm thickness, reinforced using galvanized steel omegas (DX-F5 cold lamination) 1mm thickness, every 600mm. All this parts are screwed and glued during the fabrication process. The perimeter is made of aluminium profiles (alloy 6005)

Sidewalls and frontwall: Plywood panel of 14 mm thickness. Fire resistant panel, factor M2. Aluminium profiles (alloy 6005). The exterior part of the plywood panel in RAL 9010. This type of body has no exterior sealing.

Rear frame: Made of galvanized steel DX51 Z275 MAC 2,5 mm thickness, reinforced in the squares, semiautomatic welding.

Rear doors: Sandwich panel of 30mm thickness, composed by polyester 1,6mm/ polystyrene (44kg/m3)/ polyester 1,6mm. Fire resistant panel, factor M3. Stainless steel AISI 304 locks and hinges, recessed locks.

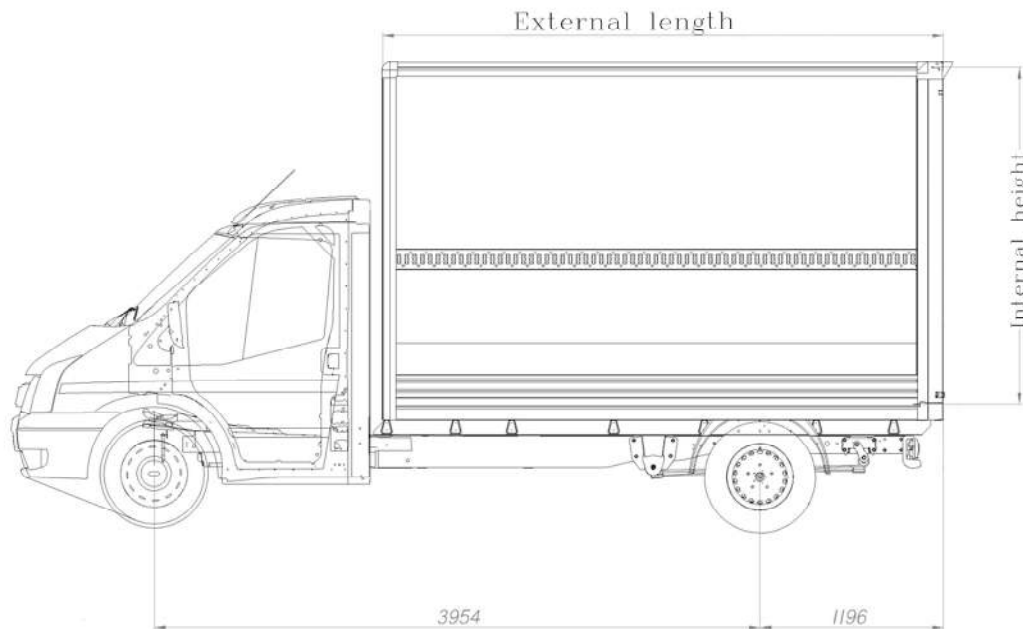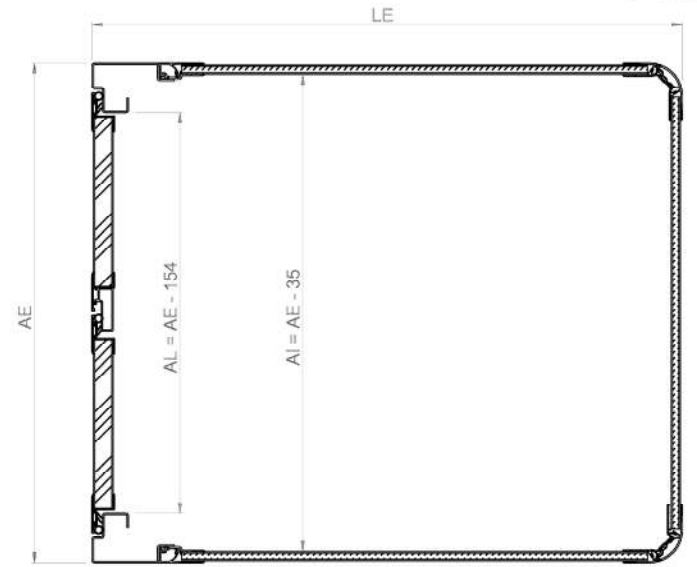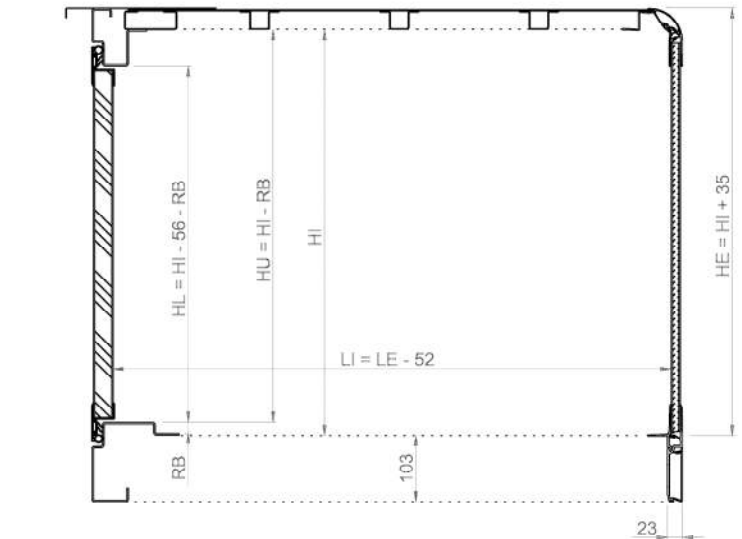

Test of maximum resistance of load rails



Safety of loads XL EN 12642



Quality management certificate



Environmental management certificate