



LIDERKIT GROUP

Pol. Ind. El Guadiel Tel. + 34 953 67 80 41
 Avd. Linares, 17 Fax. + 34 953 67 63 52
 23210 Guarroman www.liderkit.com
 Jaen (SPAIN)

MODEL 463. SLIDING CURTAIN KIT

Roof: Made of translucent polyester 1,6mm thickness, reinforced using galvanized steel omegas (DX-F5 cold lamination) 1mm thickness, every 600mm. All these parts are screwed and glued during the fabrication process. The perimeter is made of aluminium profiles (alloy 6005)

Sidewall: Composed by a frame of galvanized steel and a sliding curtain with a weight of 900gr/cm2. The system includes two aluminium boards with a lock, and a superior and inferior guide with wheels that make easier the opening of the sliding curtain.

Frontwall: there are 2 options available:




- 1.- Plywood panel 17mm thickness. Fire resistant panel factor M2. Aluminium profiles (alloy 6005).
- 2.- Aluminium clipped profiles. (profiles of alloy 6005)

The perimeter is made of aluminium profiles (alloy 6005)

All the parts are assembled with screws, rivets and glued in the interior part.

Rear frame: Made of galvanized steel DX51 Z275 MAC 2,5 mm thickness, reinforced in the squares, semiautomatic welding.

Rear doors: Sandwich panel of 30mm thickness, composed by polyester 1,6mm/ polystyrene (44kg/m3)/ polyester 1,6mm. Fire resistant panel, factor M3. Stainless steel AISI 304 locks and hinges, recessed locks.

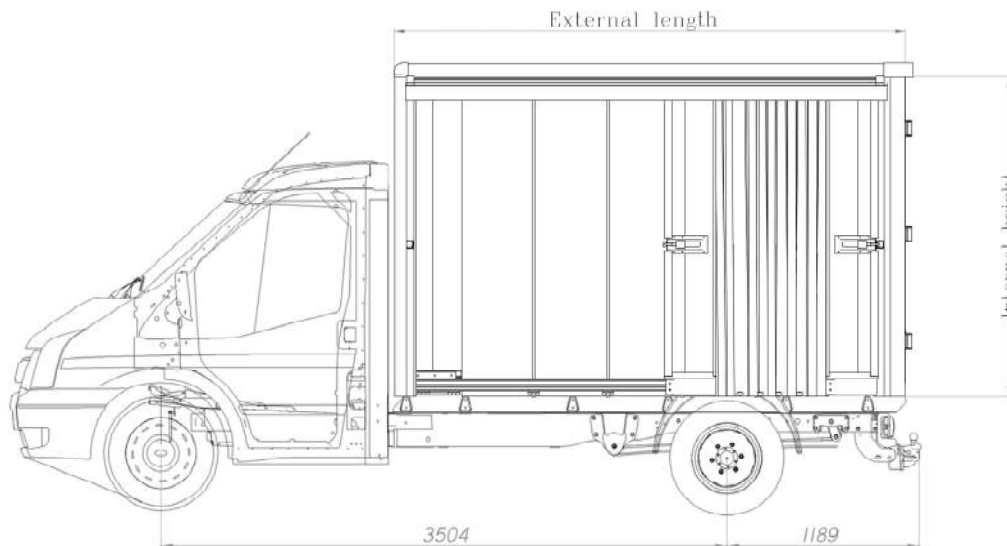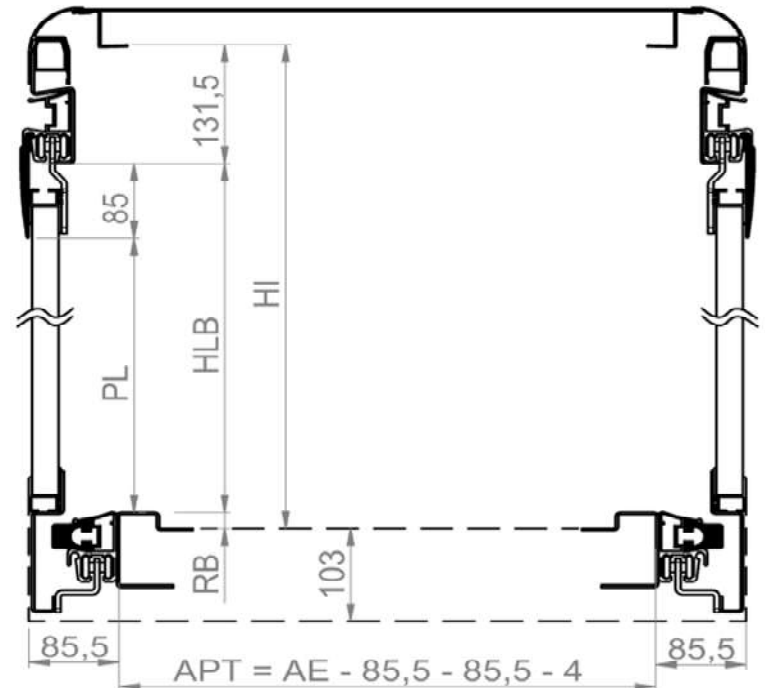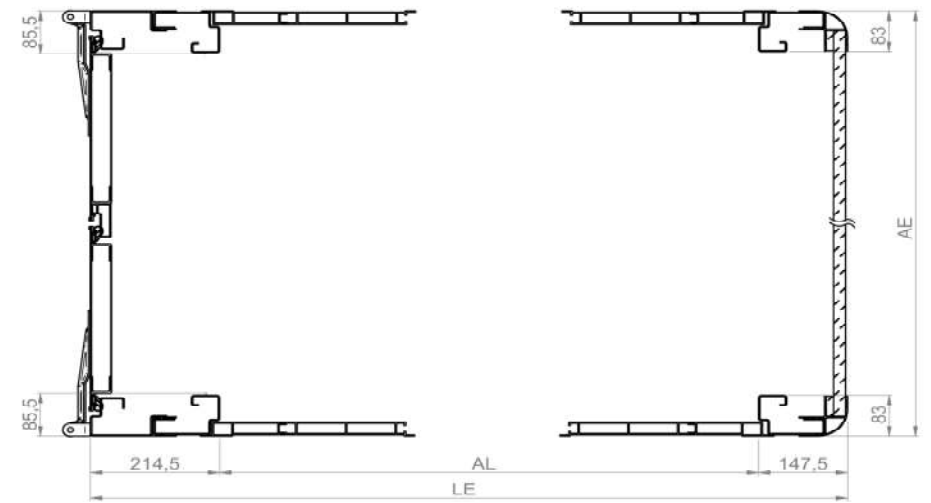

Test of maximum resistance of load rails



Safety of loads XL EN 12642



Quality management certificate



Environmental management certificate