



LIDERKIT GROUP

Pol. Ind. El Guadiel Tel. + 34 953 67 80 41
 Avd. Linares, 17 Fax. + 34 953 67 63 52
 23210 Guarroman www.liderkit.com
 Jaen (SPAIN)




MODEL 660. POLIESTER PLUS KIT 3.5MM

Roof :Made of translucent polyester 1,6mm thickness, reinforce using galvanized steel omegas (DX-F5 cold lamination) 1mm thickness, every 600mm. All this parts are screwed and glued during the fabrication process. The perimeter is made of aluminium profiles (alloy 6005)

Sidewalls and frontwall: made of polyester sheet 3,5mm thickness, reinforced using galvanized steel omegas (alloy 6063), every 400 mm. The perimeter is made of aluminium profiles (alloy 6005). All the parts are assembled using screws, rivets and glued in the interior part. This type of box body has no exterior sealing.

Rear frame: Made of galvanized steel DX51 Z275 MAC 2,5 mm thickness, reinforced in the squares, semiautomatic welding

Rear doors: Sandwich panel of 30mm thickness, composed by polyester 1,6mm/ polystyrene (44kg/m3)/ polyester 1,6mm. Fire resistant panel, factor M3.Stainless steel AISI 304 locks and hinges, recessed locks.

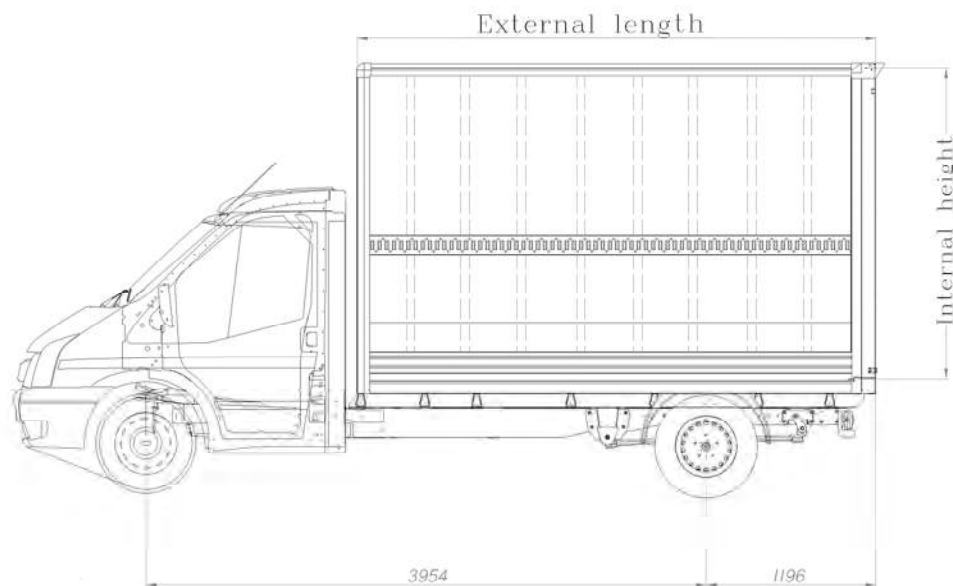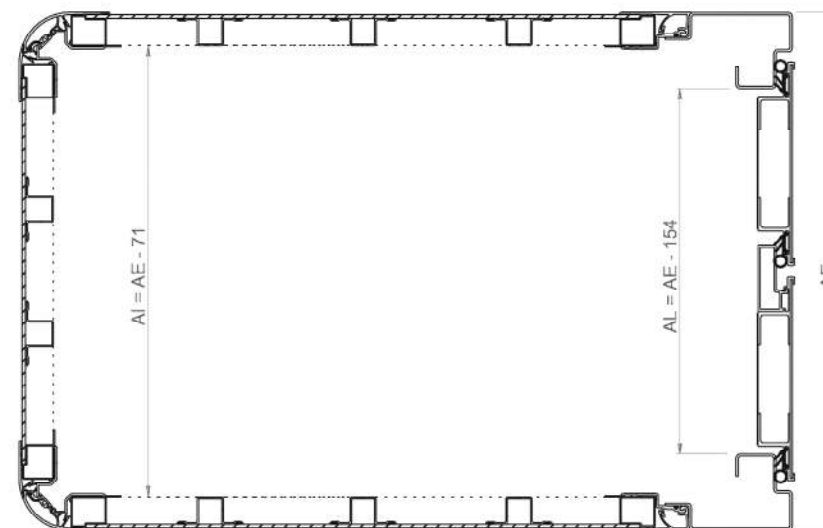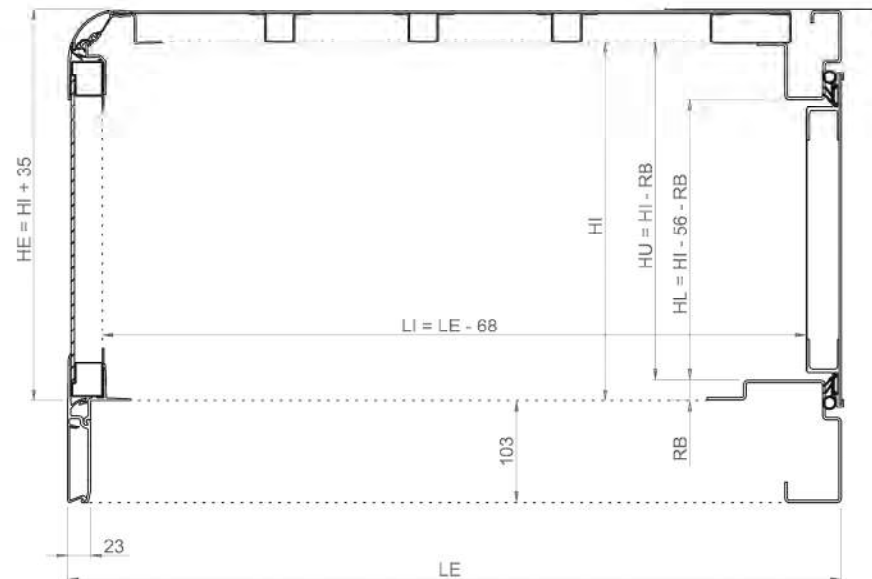

Test of maximum resistance of load rails



Safety of loads XL EN 12642



Quality management certificate



Environmental management certificate